



2019 —  
**HOME&LIFE**





# CONTENTS —

HOME&LIFE

<b>02</b>	<b>LEDLENSER</b>	<b>44</b>	<b>X-SERIES</b>
02	ABOUT US	45	X21R
04	WARRANTY		
06	MARKETING SUPPORT	<b>46</b>	<b>SOLIDLINES</b>
08	TECHNOLOGIES	46	SL-PRO25
10	LIGHT FUNCTIONS	46	SL-PRO110
		47	SL-PRO220
<b>12</b>	<b>FLASHLIGHTS</b>	47	SL-PRO300
<b>14</b>	<b>P-SERIE</b>	47	SH-PRO90
16	P17R	47	SH-PRO100
19	P17		
20	P14	<b>48</b>	<b>L-SERIES</b>
21	P7	48	L7
22	P7R		
24	P7QC	<b>50</b>	<b>HEADLAMPS</b>
26	P6	<b>52</b>	<b>SEO-SERIES</b>
27	P5R	53	SE07R
28	P5	54	SE05
29	P4X	55	SE03
30	P4		
31	P3R	<b>56</b>	<b>H-SERIES</b>
32	P3	58	H14R.2
33	P2	61	H8R
		63	H7R.2
<b>34</b>	<b>T-SERIES</b>	64	H7.2
36	T7.2	65	H6R
37	T7M	66	H6
38	T²QC	67	H3.2
39	T²	68	H4R <b>NEW</b>
40	T5.2	69	H4 <b>NEW</b>
41	TT		
		<b>70</b>	<b>LANTERN</b>
<b>42</b>	<b>F-SERIES</b>	<b>70</b>	<b>PL-SERIES</b>
42	F1R   F1	70	PL6
<b>43</b>	<b>K-SERIES</b>	<b>72</b>	<b>ACCESSORIES</b>
43	K3   K2   K1		
		<b>80</b>	<b>NOTES</b>

# — LEDLENSER ABOUT US

Many revolutionary products first saw the light of day in a garage. This was also the case with the first Ledlenser. When Harald and Rainer Opolka founded the company Zweibrüder Optoelectronics in 1993, they really didn't have much more than a garage, an old Atari computer, a set of tools, a sketchpad and around 1,000 Deutschmarks in seed capital.

Today, the company that started in a garage is an international flashlight and headlamp manufacturer that remains globally unmatched. With over 1,000 employees worldwide, we share the aim of improving a little every day – in everything we do. We are therefore continually expanding our product range, scrutinizing even tried and tested ideas and increasingly relying on sustainable energy sources.

## KEYPOINTS

- One of the global market leaders in LED flashlights and headlamps
- More than 1,000 employees worldwide
- In-house development, production and quality assurance
- More than 15 years of experience and know-how
- Worldwide collaboration with over 45 master distributors
- Locations in Germany, Italy, Japan and Switzerland
- More than 100 industrial property rights including e.g. patents, utility models and designs
- Over 200 awards, distinctions and test ratings for more than 70 of our flashlights and headlamps



Management  
System  
ISO 9001:2015  
ISO 14001:2015  
ISO 50001:2011

[www.tuv.com](http://www.tuv.com)  
ID 9108640713

# — LEDLENSER QUALITY GUARANTEED



**7**  
**YEAR**  
**WARRANTY<sup>4</sup>**



## GERMAN ENGINEERING & DESIGN

To us, „German Engineering & Design“ is not just an empty phrase -it means the highest expectations in technology, design, innovation, materials, workmanship and sustainability. We hold more than 100 industrial property rights. These include patents, utility models, and designs. Furthermore, we are proud of having received various design awards for our products.

Since we are confident in the quality of our lights, virtually all of our products are covered by a five-year warranty<sup>4</sup> - but there's more: Upon product registration, our customers have the option of extending the warranty to seven years.

All original Ledlenser products covered by our warranty include a product registration card. To register the product, scan the QR code with a smartphone or enter the indicated URL on a laptop or PC.



<sup>4</sup> Information on page 80

# LEDLENSER MARKETING SUPPORT

You can count on a well-thought-out marketing plan with effective and flexible marketing strategies or similar and substantial sales support.



## CUSTOMER COMMUNICATION

- Brochures
- Advertisements in special-interest publications
- 360° Campaigns
- Social media
- Online advertising



## SALES SUPPORT

- Retailer information
- Sales promotions
- Training / instruction



## POS-COMMUNICATION

Our display line brings the Ledlenser experience to life at the POS.

Simply contact your Ledlenser representative to find the optimal display for your sales support offers



## TRADE SHOWS AND OTHER EVENTS

Take part in our activities and sell products at large events with minor investments.

Simply contact our sales representatives or key account managers to find out which events functions are taking place in your area.



# LEDLENSER TECHNOLOGIES

Having the leading edge comes down to the best technology. From innovative lenses to pioneering power supplies – we work tirelessly to advance our technological edge. The highlights of our technology:



## ADVANCED FOCUS SYSTEM

Galileo swore by the power of lenses; Newton by the power of reflectors. We have simply combined the two technologies – only better than anyone before. The result: our patented Advanced Focus System (AFS), which allows a seamless transition from homogeneous low beam to sharply focused high beam. The efficiency of the AFS even has experts thrilled.



## X-LENS TECHNOLOGY

This technology is an enhancement of the Advanced Focus System (AFS). It can merge virtually any number of reflector lenses and synchronizes their individual light beams into a perfect beam, resulting in a high-grade, homogeneous floodlight in unfocused mode and our most sharply focused high beam to date.



## FLOATING CHARGE SYSTEM

Wireless charging: With the Floating Charge System which can be wall-mounted and the magnetic charging cable, the light is ready to use with a simple flick of the wrist. In addition to charging via USB, with an adapter the system can also be plugged into standard outlets or connected to cigarette lighter plugs in cars.



## SMART LIGHT TECHNOLOGY (SLT)

This innovation turns a Ledlenser into your personal lighting tool: A micro-controller allows individual ranges of functions to be programmed to different touch and switch combinations. That way, you always have the perfect light mode at hand.



## OPTISENSE TECHNOLOGY

Whether it's dusk, shady, dim or pitch-black: Thanks to Optisense Technology, your Ledlenser automatically adapts to the present light conditions. The innovative dimmer controls the luminosity based on the reflection of its own light and prevents annoying glare.



## WIDE BEAM

Our wide beam format takes into account that the human field of vision is around 180° degrees horizontally and only around 130° degrees vertically. The oval shape of the light and the Wide Beam technology makes things twice as safe: not only allowing you to see more, but also to be seen from every angle.



## RAPID FOCUS

When you focus and defocus the flashlight or headlamp, our reflector lens moves in relation to the LED. In order to create the fastest and most ergonomic process possible for users, we developed Rapid Focus: a single-hand operated mechanism used to change the light mode at lightning speed.



## SAFETY YTRION CELL

A Safety Ytrion Cell is considerably lighter than a nickel-metal hybrid battery and charges up to five times faster than a lithium-ion battery. Plus it offers more than 5,000 charge cycles with virtually zero capacity loss due to "memory effect".



## NATURAL LIGHT

In some situations, not all light is the same. Ledlenser therefore not only supplies extremely bright, but also extremely natural light: Natural Light produces light with a color rendering index (CRI) over 90. This ensures true color rendering, even in the deep red color range.



## DUAL POWER SOURCE

Our Dual Power Source allows you to use the full performance of your Ledlenser at any time – no matter what power source you have available. Because this technology recognises the power source. You can therefore choose between the rechargeable Ledlenser battery or a disposable battery. Extremely practical for long trips without a power point.



## POWERBANK

Even in the remotest corners of the world, you'll never again have to worry about any device's battery running out. Ledlenser lights have a Power Bank function so they can easily be used as charging stations to recharge any device quickly via a simple USB connection.



## TEMPERATURE CONTROL

Our lights stay cool, even when they work hard: Thanks to the intelligent and fully automated temperature control, a Ledlenser never gets too hot, no matter how much it's used. This protects you from burns and the LED from overheating.



## EMERGENCY LIGHT

This feature turns your flashlight into an emergency light: If the power goes out while your Ledlenser is on the charging base, it will automatically turn on. So the light helps you find your way around, e.g. to the breaker panel.



## MICRO PRISM TECHNOLOGY

Our innovative lens technology features an optical microstructure, which provides both glare-free light distribution and high efficiency at the same time. It ensures a downward beam that is up to three times stronger than conventional scattered light lenses and therefore provides optimal light distribution in the room, regardless of whether the light sits on a table or hangs from the ceiling. It creates a brighter view, whether used indoors or outdoors.



## COOLING TECHNOLOGY

Cooling Technology (CT) ensures your head stays cool even when your lamp is at maximum power. Our CT products reduce LED heat to the optimal level by means of the intelligent use of cooling elements. This technology is also used to cool computer chips and ensures highly efficient use of energy, increased illuminating power, and especially long-lasting LEDs.

# LEDLENSER LIGHT FUNCTIONS



## BOOST

A temporary burst of light.



## POWER

A bright light for any situation.



## MID POWER

Sufficient light output for extended battery life.



## LOW POWER

Economical light for long battery life, glare-free reading and working.



## PULSE

The light intensity keeps rising and decreasing evenly.



## STROBE

Quick flashes of light with an irritating blinding effect for emergency situations.



## BLINK

Automatically emits light pulses at regular intervals.



## POSITION

Regular light pulses at long intervals for position marking.



## S.O.S.

The light emits an SOS distress signal in Morse code (3 x short, 3 x long, 3 x short).

# IP PROTECTION CLASSES

IP PROTECTION TYPE ACCORDING TO EN 60529 **IP56**

1st digit: Solid particle protection

2nd digit: Protection against liquids

## 1ST DIGIT: SOLID PARTICLE PROTECTION

- 0 No protection against particles
- 1 Protection against ingress of solid particles with diameters of >50mm
- 2 Protection against ingress of solid particles with diameters of >12,5mm
- 3 Protection against ingress of solid particles with diameters of >2,5mm
- 4 Protection against ingress of solid particles with diameters of >1mm
- 5 Protection against harmful dust deposits inside
- 6 Protection against ingress of dust (dust-tight)

## 2ND DIGIT: PROTECTION AGAINST LIQUIDS





- 0 No protection against water ingress
- 1 Protection against vertically dripping water
- 2 Protection against angled dripping water (15° tilt)
- 3 Protection against spraying water (up to 60° angle)
- 4 Protection against splashing water (from all directions)
- 5 Protection against water jets (from all directions)
- 6 Protection against powerful water jets
- 7 Protection against water ingress with brief immersion
- 8 Protection in case of indefinite immersion

To achieve the protection rating, the light must be fully closed and the focus system, if featured, should not be moved.

# — LEDLENSER HOME&LIFE SERIES FLASHLIGHTS



P-SERIES: MINIMALIST DESIGN,  
MAXIMUM PERFORMANCE.

P2	Lumen (max.) 16 lm¹	Beam distance (max.) 25 m¹	Run time (max.) 7 h¹	MSRP(€) 14.90	
P3	Lumen (max.) 25 lm¹	Beam distance (max.) 60 m¹	Run time (max.) 6 h¹	MSRP(€) 14.90	
P3R 	Lumen (max.) 140 lm¹	Beam distance (max.) 100 m¹	Run time (max.) 6 h¹	MSRP(€) 34.90	
P4	Lumen (max.) 18 lm¹	Beam distance (max.) 25 m¹	Run time (max.) 8,5 h¹	MSRP(€) 24.90	
P4X	Lumen (max.) 120 lm¹	Beam distance (max.) 80 m¹	Run time (max.) 20 h¹	MSRP(€) 34.90	
P5	Lumen (max.) 140 lm¹	Beam distance (max.) 120 m¹	Run time (max.) 4 h¹	MSRP(€) 44.90	
P5R 	Lumen (max.) 420 lm¹	Beam distance (max.) 240 m¹	Run time (max.) 15 h¹	UVP(€) 79.90	
P6	Lumen (max.) 200 lm¹	Beam distance (max.) 120 m¹	Run time (max.) 15 h¹	MSRP(€) 44.90	

1-5 Information on page 80

P7	Lumen (max.) 450 lm¹	Beam distance (max.) 300 m¹	Run time (max.) 25 h¹	MSRP(€) 69.90	
P7QC	Lumen (max.) 220 lm¹	Beam distance (max.) 60 m¹	Run time (max.) 20 h¹	MSRP(€) 59.90	
P7R 	Lumen (max.) 1000 lm¹	Beam distance (max.) 210 m¹	Run time (max.) 40 h¹	MSRP(€) 99.90	
P14	Lumen (max.) 800 lm¹	Beam distance (max.) 350 m¹	Run time (max.) 50 h¹	MSRP(€) 79.90	
P17	Lumen (max.) 1000 lm¹	Beam distance (max.) 450 m¹	Run time (max.) 300 h¹	MSRP(€) 89.90	
P17R 	Lumen (max.) 1000 lm¹	Beam distance (max.) 450 m¹	Run time (max.) 60 h¹	MSRP(€) 199.00	




1-5 Information on page 80

# P17R



## THE HIGHLIGHT OF THE P-SERIES.



 1000 lm<sup>1</sup> —  
 450 m<sup>1</sup> —  
 60 h<sup>1</sup> —

- 01** – Emergency Light - Be prepared for power outages.
- 02** – Focus Lock - fixes the current level of focus in place.
- 03** – Easy to use - fast switching and focusing with only one hand!
- 04** – Intelligent controls - thumb-selection of all SLT functions via soft touch.
- 05** – Sustainable rechargeable battery technology - it's safe, without any significant loss of capacity and one of the most efficient technologies with 5000 charging cycles.
- 06** – Full control of your power status – battery indicator and charge indicator.
- 07** – Comfortable Charging - via Floating Charge System



P17R



LED

	Boost	Power	Mid Power	Low Power
Luminous flux¹ (lm)	–	1000	–	100
Beam distance¹ (m)	–	450	–	150
Run Time¹ (h)	–	8	–	60
Light Modes	Low Power,Power,Blink,S.O.S.,Strobe,Position			
Configuration	1x Xtreme LED			

CASING

Lenght – defocused (mm)	290
Head diameter (mm)	53
Weight (g   oz)	715   25.2
Water Resistance	IP54
Switch	Multifunctional Switch

BATTERY

LiFePO4 rechargeable battery	Battery Pack 6.4V
Capacity² (Wh/mAh)	32 / 5000
Charge Time⁵ (min)	240
Temperature Range	-20°C to +40°C

FEATURES

Energy Saving, Constant Current
Charge Indicator, Battery Indicator
Focus Lock, Transportation Lock, Dimmable

Accessories on page 72

TECHNOLOGIES

ADVANCED FOCUS SYSTEM

EMERGENCY LIGHT

TEMPERATURE CONTROL

FLOATING CHARGE SYSTEM

RAPID FOCUS

SAFETY YTRION CELL

SMART LIGHT TECHNOLOGY

PACKAGING AND LOGISTICS

	Gift Box
Item number	501049
GTIN	4058205010245
Packaging dimensions (mm)	351 x 96 x 126 (W x H x D)
Tare weight (g)	1750
Contents	1 battery pack, adapter, adapter cabel, floating charge system, intelligent clip
Price, MSRP (€)	199.00

1-5 Information on page 80

P17



LED

	Boost	Power	Mid Power	Low Power
Luminous flux¹ (lm)	1000	400	–	100
Beam distance¹ (m)	450	300	–	150
Run Time¹ (h)	15	50	–	300
Light Modes	Low Power, Power, Boost			
Configuration	1x Xtreme LED			

CASING

Lenght – defocused (mm)	312
Head diameter (mm)	53
Weight (g   oz)	785   27.7
Water Resistance	IP54
Switch	Front Switch

BATTERY

Battery	3x Mono (D) 1.5V
Capacity² (Wh/mAh)	–
Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

FEATURES

Energy Saving
---------------

Accessories on page 72

TECHNOLOGIES

ADVANCED FOCUS SYSTEM

RAPID FOCUS

PACKAGING AND LOGISTICS

	Gift Box	Blister
Item number	500903	500904
GTIN	4058205009935	4058205009942
Packaging dimensions (mm)	365 x 59 x 124 (W x H x D)	170 x 440 x 59 (W x H x D)
Tare weight (g)	1143	1022
Contents	1 set of batteries, intelligent Clip	1 set of batteries, intelligent clip
Price, MSRP (€)	89.90	89.90

1-5 Information on page 80

P14



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	800	250	–	40
↔ Beam distance¹ (m)	350	230	–	110
🕒 Run Time¹ (h)	1	4	–	50
Light Modes	Low Power, Power, Boost			
Configuration	1x Xtreme LED			

BATTERY

🔋 Battery	4x Mignon (AA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	198
🌀 Head diameter (mm)	47
⚖ Weight (g   oz)	350   12.3
☁ Water Resistance	IP54
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



RAPID  
FOCUS

PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	500901	500902
GTIN	4058205009911	4058205009928
Packaging dimensions (mm)	266 x 73 x 80 (W x H x D)	150 x 340 x 89 (W x H x D)
Tare weight (g)	610	688
Contents	1 set of batteries, belt pouch, wrist strap	2 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	79.90	79.90

1-5 Information on page 80

P7



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	450	250	40
↔ Beam distance¹ (m)	–	300	220	100
🕒 Run Time¹ (h)	–	1	2	25
Light Modes	Low Power, Mid Power, Power			
Configuration	1x High Power LED			

BATTERY

🔋 Battery	4x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	130
🌀 Head diameter (mm)	37
⚖ Weight (g   oz)	175   6.2
☁ Water Resistance	IP54
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



RAPID  
FOCUS




PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	501046	500900
GTIN	4058205009898	4058205009904
Packaging dimensions (mm)	154 x 74 x 72 (W x H x D)	150 x 280 x 91 (W x H x D)
Tare weight (g)	328	398
Contents	1 set of batteries, belt pouch, wrist strap	2 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	69.90	69.90

1-5 Information on page 80

P7R 



	1000	lm <sup>1</sup>
	210	m <sup>1</sup>
	40	h <sup>1</sup>

# P7QC



220 lm<sup>1</sup>  
 60 m<sup>1</sup>  
 20 h<sup>1</sup>



1 MULTICOLOR LED  
4 COLORS

- 01 – The P-Series tracker – The little sister of the P7QC, the T<sup>2</sup>QC, can be found on page 38.
- 02 – Smart options – with rotary switch to change the individual colors even during use
- 03 – Durable and tough - sturdy scratch- and impact-resistant aluminum casing.
- 04 – Durable and tough - sturdy scratch- and impact-resistant aluminum casing.

RED  
Maintaining night vision

GREEN  
Observing game and wildlife, green light is almost invisible to animals

BLUE  
Tracking, shows fluids in higher contrast

<sup>1-5</sup> Information on page 80

## LED

	Boost	Power	Mid Power	Low Power
Luminous flux <sup>1</sup> (lm)	–	220	–	40
Beam distance <sup>1</sup> (m)	–	60	–	20
Run Time <sup>1</sup> (h)	–	3	–	20
Light Modes	Low Power, Power, Blink			
Configuration	1x Multicolor LED			

## BATTERIE

Battery	4x Micro (AAA) 1.5V
Capacity <sup>2</sup> (Wh/mAh)	–
Charge Time <sup>5</sup> (min)	–
Temperature Range	-20°C to +40°C

Accessories on page 72

## CASING

Length – defocused (mm)	133
Head diameter (mm)	37
Weight (g   oz)	175   6.2
Water Resistance	IPX7
Switch	End Cap Switch

## FEATURES

Energy Saving

## TECHNOLOGIES



The little sister of the P7QC, the T<sup>2</sup>QC, can be found on page 38.

## PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	9407-Q	9607-Q
GTIN	4029113940764	4029113960786
Packaging dimensions (mm)	151 x 73 x 71 (W x H x D)	150 x 280 x 105 (W x H x D)
Tare weight (g)	327	418
Contents	1 set of batteries, belt pouch, wrist strap	2 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	59.90	59.90

<sup>1-5</sup> Information on page 80

P6



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	200	–	–
↔ Beam distance¹ (m)	–	120	–	–
🕒 Run Time¹ (h)	–	15	–	–
Light Modes	Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	2x Mignon (AA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	163
🌀 Head diameter (mm)	26
⚖ Weight (g   oz)	115   4.1
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	500921	500922
GTIN	4058205010825	4058205010856
Packaging dimensions (mm)	210 x 61 x 72 (W x H x D)	150 x 280 x 50 (W x H x D)
Tare weight (g)	285	339
Contents	1 set of batteries, belt pouch, wrist strap	2 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	44.90	44.90

1-5 Information on page 80

P5R



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	420	–	20
↔ Beam distance¹ (m)	–	240	–	50
🕒 Run Time¹ (h)	–	3	–	15
Light Modes	Low Power, Power, Strobe			
Configuration	1x High Power LED			

BATTERY

🔋 Li-ion rechargeable battery	1x 14500 3.7V
Capacity² (Wh/mAh)	2.59 / 700
🕒 Charge Time⁵ (min)	150
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	117
🌀 Head diameter (mm)	26
⚖ Weight (g   oz)	75   2.6
☁ Water Resistance	IP54
Switch	End Cap Switch

FEATURES

Energy Saving, Low Battery Warning
Focus Lock

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box	Blister
Item number	500897	500898
GTIN	4058205009874	4058205009881
Packaging dimensions (mm)	182 x 76 x 129 (W x H x D)	112 x 205 x 89 (W x H x D)
Tare weight (g)	403	326
Contents	1 rechargeable battery, floating charge system, belt pouch, wrist strap, mounting materials, USB cable	1 rechargeable battery, floating charge system, belt pouch, wrist strap, mounting materials, USB cable
Price, MSRP (€)	79.90	79.90

1-5 Information on page 80

P5



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	140	–	–
➡ Beam distance¹ (m)	–	120	–	–
🕒 Run Time¹ (h)	–	4	–	–
Light Modes	Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	1x Mignon (AA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

📏 Lenght – defocused (mm)	113
🌀 Head diameter (mm)	26
⚖ Weight (g   oz)	80   2.8
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



RAPID  
FOCUS

PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	500895	500896
GTIN	4058205009850	4058205009867
Packaging dimensions (mm)	151 x 58 x 62 (W x H x D)	112 x 205 x 75 (W x H x D)
Tare weight (g)	202	220
Contents	1 set of batteries, belt pouch, wrist strap	2 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	44.90	44.90

1-5 Information on page 80

P4X



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	120	–	10
➡ Beam distance¹ (m)	–	80	–	20
🕒 Run Time¹ (h)	–	4	–	20
Light Modes	Low Power, Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	2x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

📏 Lenght – defocused (mm)	140
🌀 Head diameter (mm)	15
⚖ Weight (g   oz)	55   1.9
☁ Water Resistance	IP54
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM

PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	500747	500748
GTIN	4058205000611	4058205000628
Packaging dimensions (mm)	140 x 38 x 58 (W x H x D)	112 x 205 x 60 (W x H x D)
Tare weight (g)	152	172
Contents	1 set of batteries, pocket clip	2 set of batteries, pocket clip
Price, MSRP (€)	34.90	34.90

1-5 Information on page 80

P4



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	18	–	–
➡ Beam distance¹ (m)	–	25	–	–
🕒 Run Time¹ (h)	–	8.5	–	–
Light Modes	Power			
Configuration	1x Low Power LED			

BATTERY

🔋 Battery	2x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	147
🌀 Head diameter (mm)	14.5
⚖ Weight (g   oz)	53   1.9
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM

PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	8404	8604
GTIN	4029113840408	4029113860451
Packaging dimensions (mm)	177 x 41 x 74 (W x H x D)	150 x 280 x 70 (W x H x D)
Tare weight (g)	154	231
Contents	1 set of batteries, pocket clip, keyring, wrist strap, belt pouch	2 set of batteries, pocket clip, keyring, wrist strap, belt pouch
Price, MSRP (€)	24.90	24.90

1-5 Information on page 80

P3R



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	140	–	20
➡ Beam distance¹ (m)	–	100	–	40
🕒 Run Time¹ (h)	–	2.5	–	6
Light Modes	Low Power, Power			
Configuration	1x Power LED			

BATTERY

🔋 Li-ion rechargeable battery	1x 10440 3.7V
Capacity² (Wh/mAh)	1.184 / 320
🕒 Charge Time⁵ (min)	150
Temperature Range	-20°C to +40°C

CASING

↗ Lenght – defocused (mm)	102
🌀 Head diameter (mm)	20
⚖ Weight (g   oz)	42   1.5
☁ Water Resistance	IP54
Switch	End Cap Switch

FEATURES

Energy Saving, Low Battery Warning
Charge Indicator

Accessories on page 72

TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



RAPID  
FOCUS



TEMPERATURE  
CONTROL

PACKAGING AND LOGISTICS

	Gift Box	Blister
Item number	501048	500879
GTIN	4058205009362	4058205009331
Packaging dimensions (mm)	143 x 50 x 60 (W x H x D)	112 x 205 x 62 (W x H x D)
Tare weight (g)	168	170
Contents	1 rechargeable battery, wrist strap, charging base	1 rechargeable battery, wrist strap, charging base
Price, MSRP (€)	34.90	34.90

1-5 Informationen on page 80

P3



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	25	–	–
➡ Beam distance¹ (m)	–	60	–	–
🕒 Run Time¹ (h)	–	6	–	–
Light Modes	Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	1x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

📏 Lenght – defocused (mm)	90
🌀 Head diameter (mm)	19
⚖ Weight (g   oz)	35   1.2
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	500882	500883
GTIN	4058205009393	4058205009423
Packaging dimensions (mm)	148 x 50 x 60 (W x H x D)	112 x 205 x 61 (W x H x D)
Tare weight (g)	105	140
Contents	1 set of batteries belt pouch, wrist strap, keyring, pocket clip	2 set of batteries, belt pouch, wrist strap, keyring, pocket clip
Price, MSRP (€)	14.90	14.90

1-5 Informationen on page 80

P2



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	16	–	–
➡ Beam distance¹ (m)	–	25	–	–
🕒 Run Time¹ (h)	–	7	–	–
Light Modes	Power			
Configuration	1x Low Power LED			

BATTERY

🔋 Battery	1x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C bis +40°C

CASING

📏 Lenght – defocused (mm)	102
🌀 Head diameter (mm)	145
⚖ Weight (g   oz)	36   1.3
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	8402	8602
GTIN	4029113840200	4029113860253
Packaging dimensions (mm)	148 x 52 x 60 (W x H x D)	112 x 205 x 57 (W x H x D)
Tare weight (g)	130	147
Contents	1 set of batteries, pocket clip, keyring, wrist strap, belt pouch	2 set of batteries, pocket clip, keyring, wrist strap, belt pouch
Price, MSRP (€)	14.90	14.90

1-5 Informationen on page 80

— T-SERIES: THE BEST TACTIC IS ACTIVATION.

T7.2



T7M



T<sup>2</sup>QC



T<sup>2</sup>



T5.2



TT



Luminous flux (max.):	320 lm <sup>1</sup>	400 lm <sup>1</sup>	140 lm <sup>1</sup>	240 lm <sup>1</sup>	140 lm <sup>1</sup>	280 lm <sup>1</sup>
Beam distance (max.):	260 m <sup>1</sup>	280 m <sup>1</sup>	25 m <sup>1</sup>	180 m <sup>1</sup>	120 m <sup>1</sup>	220 m <sup>1</sup>
Run time (max.):	25 h <sup>1</sup>	35 h <sup>1</sup>	4 h <sup>1</sup>	25 h <sup>1</sup>	4 h <sup>1</sup>	25 h <sup>1</sup>
MSRP(€)	74.90	99.90	34.90	44.90	44.90	54.90

<sup>1-5</sup> Information on page 80

T7.2



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	320	250	–	40
↔ Beam distance¹ (m)	260	220	–	100
🕒 Run Time¹ (h)	1	2	–	25
Light Modes	Low Power, Power, Boost			
Configuration	1x High Power LED			

BATTERY

🔋 Battery	4x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	9807	9907
GTIN	4029113980708	4029113990752
Packaging dimensions (mm)	154 x 73 x 75 (W x H x D)	150 x 280 x 90 (W x H x D)
Tare weight (g)	340	391
Contents	1 set of batteries, belt pouch, wrist strap, snap hook	2 set of batteries, belt pouch, wrist strap, snap hook
Price, MSRP (€)	74.90	74.90

1-5 Information on page 80

T7M




LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	400	300	–	40
↔ Beam distance¹ (m)	280	240	–	100
🕒 Run Time¹ (h)	2	5	–	35
Light Modes	Low Power, Power,Boost,Blink,S.O.S.,Strobe			
Configuration	1x High Power LED			

BATTERY

🔋 Battery	4x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

TECHNOLOGIES

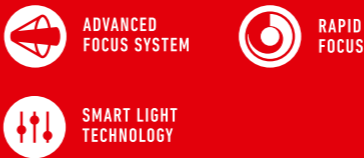

PACKAGING AND LOGISTICS

	Gift Box
Item number	9807-M
GTIN	4029113980739
Packaging dimensions (mm)	155 x 73 x 73 (W x H x D)
Tare weight (g)	343
Contents	1 set of batteries, belt pouch, wrist strap
Price, MSRP (€)	99.90

1-5 Information on page 80

CASING

↗ Lenght – defocused (mm)	130
🌀 Head diameter (mm)	37
⚖ Weight (g   oz)	175   6.2
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

CASING

↗ Lenght – defocused (mm)	131
🌀 Head diameter (mm)	37
⚖ Weight (g   oz)	180   6.3
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving, Constant Current
Low Battery Warning, Focus Lock
Dimmable

Accessories on page 72



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	140	–	–
↔ Beam distance¹ (m)	–	25	–	–
🕒 Run Time¹ (h)	–	4	–	–
Light Modes	Power			
Configuration	1x Multicolor LED			

BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C bis +40°C


TECHNOLOGIES

The big brother of the T²QC, the P7QC, can be found on p. 24.

PACKAGING AND LOGISTICS

	Gift Box	Blister
Item number	9802-QC	9902-QC
GTIN	4029113980234	4029113990288
Packaging dimensions (mm)	149 x 54 x 60 (W x H x D)	113 x 69 x 205 (W x H x D)
Tare weight (g)	185	194
Contents	1 set of batteries, wrist strap	1 set of batteries, wrist strap
Price, MSRP (€)	34.90	34.90

¹-⁵ Information on page 80



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	240	–	25
↔ Beam distance¹ (m)	–	180	–	60
🕒 Run Time¹ (h)	–	4	–	25
Light Modes	Low Power, Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C bis +40°C

TECHNOLOGIES

PACKAGING AND LOGISTICS

	Gift Box	Test-it-Blister
Item number	9802	9902
GTIN	4029113980203	4029113990257
Packaging dimensions (mm)	149 x 54 x 60 (W x H x D)	112 x 68 x 204 (W x H x D)
Tare weight (g)	181	223
Contents	1 set of batteries, wrist strap	1 set of batteries, wrist strap
Price, MSRP (€)	44.90	44.90

¹-⁵ Information on page 80

CASING

↗ Lenght – defocused (mm)	97
🌀 Head diameter (mm)	305
⚖ Weight (g   oz)	106   3.7
☁ Water Resistance	IPX6
Switch	Rotary Switch

FEATURES

Energy Saving

Accessories on page 72

CASING

↗ Lenght – defocused (mm)	115
🌀 Head diameter (mm)	25
⚖ Weight (g   oz)	98   3.5
☁ Water Resistance	IPX6
Switch	End Cap Switch

FEATURES

Energy Saving, Low Battery Warning

Accessories on page 72

T5.2



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	140	–	–
↔ Beam distance¹ (m)	–	120	–	–
🕒 Run Time¹ (h)	–	4	–	–
Light Modes	Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	1x Mignon (AA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

📏 Lenght – defocused (mm)	113
🌀 Head diameter (mm)	26
⚖ Weight (g   oz)	80   2.8
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box
Item number	9805
GTIN	4029113980500
Packaging dimensions (mm)	149 x 60 x 60 (W x H x D)
Tare weight (g)	214
Contents	1 set of batteries, belt pouch, wrist strap, snap hook
Price, MSRP (€)	44.90

1-5 Information on page 80

TT



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	280	–	25
↔ Beam distance¹ (m)	–	220	–	80
🕒 Run Time¹ (h)	–	3	–	25
Light Modes	Low Power, Power			
Configuration	1x Power LED			

BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

CASING

📏 Lenght – defocused (mm)	116
🌀 Head diameter (mm)	32
⚖ Weight (g   oz)	132   4.7
☁ Water Resistance	IPX4
Switch	End Cap Switch

FEATURES

Energy Saving

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Gift Box
Item number	9804
GTIN	4029113980401
Packaging dimensions (mm)	147 x 54 x 60 (W x H x D)
Tare weight (g)	199
Contents	1 set of batteries, wrist strap, roll protection
Price, MSRP (€)	54.90

1-5 Information on page 80

F1R | F1



LED	F1R			F1	
	Power	Mid Power	Low Power	Power	Low Power
Luminous flux¹ (lm)	1000	250	10	400	60
Beam distance¹ (m)	160	80	20	100	60
Run Time¹ (h)	3	6	60	2	3.5
Light Modes	Low Power, Mid Power, Power			Low Power, Power, Strobe	
Configuration	1x Xtreme LED			1x High Power LED	

BATTERY

	F1R	F1
Li-ion rechargeable battery / battery	1x 18650 3.7V	1x CR 123A 3V
Capacity² (Wh/mAh)	8.14 / 2200	–
Charge Time⁵ (min)	420	–
Temperature Range	-20°C to +40°C	-20°C to +40°C

CASING

	F1R	F1
Lenght – defocused (mm)	115	90
Head diameter (mm)	30	27
Weight (g   oz)	120   4.2	69   2.4
Water Resistance	IPX8	IPX8
Switch	End Cap Switch	

FEATURES

F1R	F1
Energy Saving	Energy Saving
Low Battery Warning	Low Battery Warning
Charge Indicator	

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS

	F1R Gift Box	F1 Gift Box
Item number	8701-R	8701
GTIN	4029113870160	4029113870108
Packaging dimensions (mm)	153 x 72 x 72	147 x 39 x 67
Tare weight (g)	311	153
Contents	1 rechargeable battery, seal ring, wrist strap, charging station, brush, cleaning cloth, tactical ring, pocket clip	1 set of batteries, seal ring, wrist strap, cleaning brush, cleaning cloth, tactical ring, pocket clip
Price, MSRP (€)	139.90	84.90

1-5 Information on page 80

K3 | K2 | K1



LED	K3	K2	K1
	Power	Power	Power
Luminous flux¹ (lm)	14	20	13
Beam distance¹ (m)	33	20	16
Run Time¹ (h)	1.3	4	0.25
Light Modes	Power	Power	Power
Configuration	1x Low Power LED	1x Power LED	1x Low Power LED

BATTERY

	K3	K2	K1
4x Button Cell (LR 44) 1.5V	K2, K3		
4x Button Cell (LR 41) 1.5V	K1		
Capacity² (Wh/mAh)	–		
Charge Time⁵ (min)	–		
Temperature Range	-20°C to +40°C		

CASING

	K3	K2	K1
Lenght – defocused (mm)	77	51.8	43
Head diameter (mm)	20	1.5	10.5
Weight (g   oz)	29   1	20   0.7	10   0.4
Water Resistance	IPX4	IPX4	IPX4
Switch	End Cap Switch	Rotary Switch	Rotary Switch

FEATURES

K3	K2	K1
Energy Saving		

Accessories on page 72

TECHNOLOGIES



PACKAGING AND LOGISTICS


	K3 Gift Box	K3 Test-it-Blister	K2 Box	K2 Blister	K1 Box	K1 Blister
Item number	8313	8613	8202	8252	8201	8251
GTIN	4029113831307	4029113861359	4029113820202	4029113825252	4029113820103	4029113825153
Packaging dimensions (mm)	120 x 66 x 30	114 x 206 x 60	76 x 63 x 20	70 x 160 x 15	116 x 65 x 28	70 x 160 x 11
Tare weight (g)	72	115	36	29	49	19
Contents	1 set of batteries, keyring	2 set of batteries, keyring	1 set of batteries, keyring	1 set of batteries, keyring	1 set of batteries, keyring	1 set of batteries, keyring
Price, MSRP (€)	15.90	15.90	8.90	8.90	7.90	7.90

1-5 Information on page 80

# X21R UPDATE



☀️ 5000 lm<sup>1</sup>  
 ➡️ 800 m<sup>1</sup>  
 ⌚ 40 h<sup>1</sup>

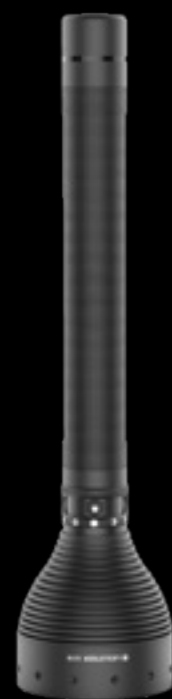

- 01** – Revolutionary rechargeable battery system Safety Ytrion Cell for fast charging and more than 5,000 charge cycles without any noticeable capacity loss.
- 02** – Always ready: Floating Charge System with bracket for convenient charging and storage.
- 03** – Extreme beam range of 800 m<sup>1</sup> thanks to High Intensity LEDs and adjustable focus.
- 04** – Very easy to operate – 8 light modes, 4 light programs, 2 energy modes, and 1 multi-function switch.
- 05** – Seamless change in the light beam – Rapid Focus.
- 06** – Fast Acton Switch for easy and precise light mode selection.



<sup>1-5</sup> Information on page 80

## LED

	Boost	Power	Mid Power	Low Power
☀️ Luminous flux <sup>1</sup> (lm)	5000	3500	–	200
➡️ Beam distance <sup>1</sup> (m)	800	600	–	150
⌚ Run Time <sup>1</sup> (h)		4	–	40
Light Modes	Low Power, Power, Boost, Blink, S.O.S., Strobe, Position			
Configuration	7x Xtreme LED			

## BATTERY

🔋 LiFePO4 rechargeable battery	Battery Pack 9.6V
Capacity <sup>2</sup> (Wh/mAh)	48 / 5000
⌚ Charge Time <sup>5</sup> (min)	210
Temperature Range	-20°C to +40°C

Accessories on page 72


## CASING

📏 Length – defocused (mm)	405
🌀 Head diameter (mm)	95
⚖️ Weight (g   oz)	1300   45.9
☁️ Water Resistance	IPX4
Switch	Multifunctional Switch

## FEATURES

Energy Saving, Constant Current
Charge Indicator, Battery Indicator
Dimmable, Transportation Lock

## TECHNOLOGIES

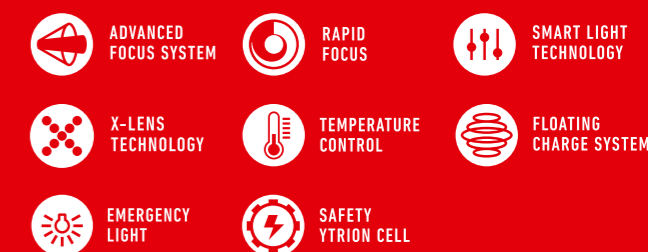

## PACKAGING AND LOGISTICS

	Case
Item number	501967
GTIN	4058205015394
Packaging dimensions (mm)	464 x 271 x 131 (W x H x D)
Tare weight (g)	4244
Contents	1 rechargeable battery, floating charge system, mounting materials, adapter, roll protection, tripod holder, carrying strap
Price, MSRP (€)	399.00

<sup>1-5</sup> Information on page 80

SOLIDLINE



LED	SL-PRO25	SL-PRO110	SL-PRO220	SL-PRO300	SH-PRO90	SH-PRO100
	Boost / Power / Mid Power / Low Power					
☀ Luminous flux¹ (lm)	- / 25 / - / -	- / 100 / - / -	- / 220 / - / -	300 / 220 / - / 40	- / 90 / - / 15	- / 100 / - / 5
📏➡ Beam distance¹ (m)	- / 60 / - / -	- / 100 / - / -	- / 180 / - / -	250 / 200 / - / 90	- / 50 / - / 10	- / 80 / - / 20
🕒 Run Time¹ (h)	- / 8 / - / -	- / 7 / - / -	- / 30 / - / -	5 / 40 / - / 50	- / 20 / - / 60	- / 8 / - / 60
Light Modes	Power	Power	Power	Low Power, Power, Boost	Blink, Low Power, Power	Power, Low Power
Configuration	1x Power LED	1x Power LED	1x Power LED	1x High Power LED	3x Power LED	1x Power LED

CASING

	SL-PRO25	SL-PRO110	SL-PRO220	SL-PRO300	SH-PRO90	SH-PRO100
📏 Lenght – defocused (mm)	81	107	115	184	-	-
🌀 Head diameter (mm)	19	24	34	44	52	28
⚖ Weight (g   oz)	33   1.2	67   2.4	128   4.5	336   11.9	98   3.5	130   4.6
☁ Water Resistance	IP54	IPX4	IPX4	IPX4	IPX4	IPX4
Switch	Rotary Switch	End Cap Switch	End Cap Switch	End Cap Switch	Front Switch	Front Switch

BATTERY

	SL-PRO25	SL-PRO110	SL-PRO220	SL-PRO300	SH-PRO90	SH-PRO100
🔋 Battery	1x Micro (AAA) 1.5V	1x Mignon (AA) 1.5V	3x Micro (AAA) 1.5V	4x Mignon (AA) 1.5V	3x Micro (AAA) 1.5V	3x Micro (AAA) 1.5V
Temperature Range	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C	-20°C to +40°C

FEATURES

	SL-PRO25	SL-PRO110	SL-PRO220	SL-PRO300	SH-PRO90	SH-PRO100
Energy Saving	Energy Saving	Energy Saving	Energy Saving	Energy Saving	Energy Saving, Transportation Lock, Red Reading Light	Energy Saving, Dimmable

Accessories: Batteries will be available from January 2019.  
4x AAA Alkaline Ionic (Item no. 500981) and 4x AA Alkaline Ionic (Item no. 500980)

PACKAGING AND LOGISTICS

	Blister	Test-it-Blister	Test-it-Blister	Test-it-Blister	Test-it-Blister	Test-it-Blister
Color	Silver	Silver	Silver	Silver	Black / Gray	Gray
Item number	501065	501066	501067	501068	501070	501069
GTIN	4058205008860	4058205008891	4058205008921	4058205008952	4058205009010	4058205008983
Packaging dimensions (mm)	112 x 180 x 25 (W x H x D)	112 x 205 x 38 (W x H x D)	112 x 205 x 49 (W x H x D)	170 x 210 x 53 (W x H x D)	112 x 205 x 95 (W x H x D)	112 x 205 x 82 (W x H x D)
Tare weight (g)	83	137	200	448	180	216
Contents	1 set of batteries, keyring	1 set of batteries, wrist strap	1 set of batteries, wrist strap	1 set of batteries, wrist strap	1 set of batteries	1 set of batteries
Price, MSRP (€)	6.99	14.90	19.90	24.90	19.90	19.90

1-5 Information on pa 80

1-5 Information on pa 80

# L7

## LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	100	–	–
➡ Beam distance¹ (m)	–	225	–	–
🕒 Run Time¹ (h)	–	6	–	–
Light Modes	Power			
Configuration	1x Power LED			

## BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

## TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



RAPID  
FOCUS

## PACKAGING AND LOGISTICS

	Test-it-Box	Test-it-Blister
Item number	7058	7008
GTIN	4029113705806	4029113700801
Packaging dimensions (mm)	70 x 225 x 40 (W x H x D)	155 x 272 x 35 (W x H x D)
Tare weight (g)	234	296
Contents	2 set of batteries, wrist strap	2 set of batteries, wrist strap
Price, MSRP (€)	39.90	39.90

¹-⁵ Information on page 80



## CASING

📏 Lenght – defocused (mm)	133
🌀 Head diameter (mm)	37
⚖ Weight (g   oz)	135   4.8
☁ Water Resistance	IP54
Switch	End Cap Switch

## FEATURES

Energy Saving


Accessories on page 72



# — LEDLENSER HOME&LIFE-SERIES HEADLAMPS




# SEO7R

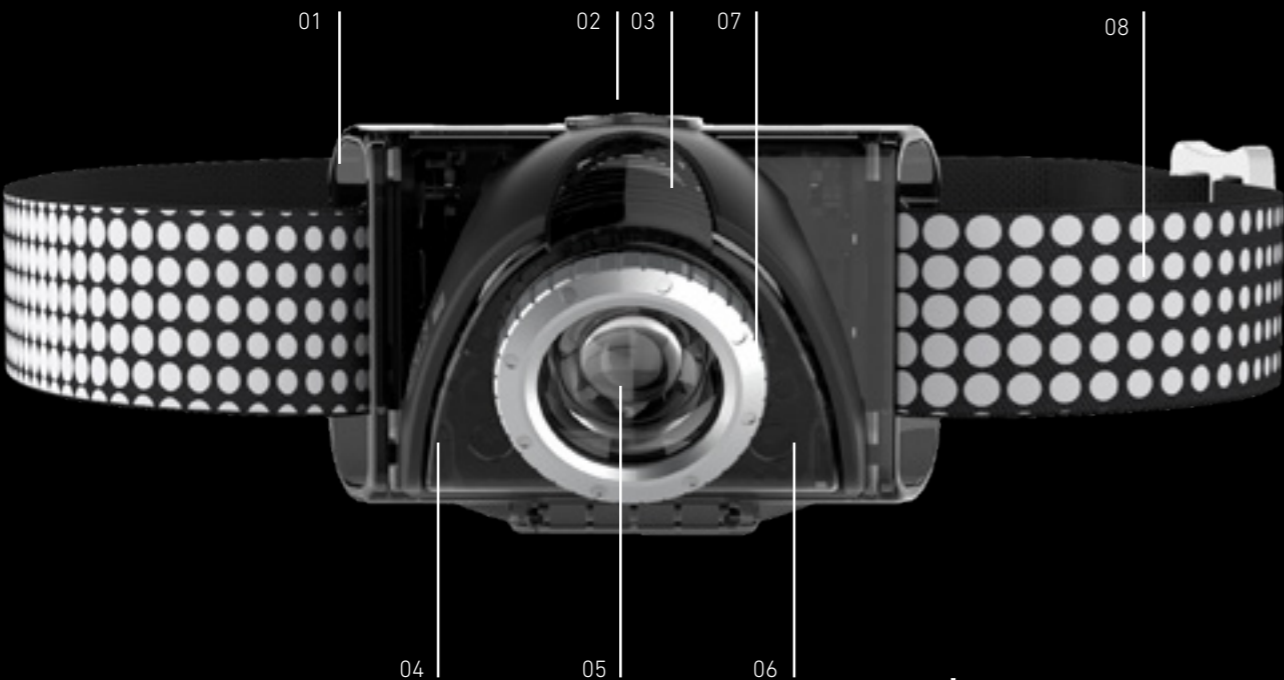

☀ 220 lm<sup>1</sup>  
➡ 130 m<sup>1</sup>  
🕒 20 h<sup>1</sup>

- 01 – Rechargeable battery with USB charging cable - eco-friendly, functional, no need for expensive disposable batteries.
- 02 – Easy operation - one switch, three light modes (Power, Mid Power, Low Power, Blink).
- 03 – Everything at a glance - pivoting head.
- 04 – Glare-free red LED with strobe function.
- 05 – One white Power LED.
- 06 – Optisense Technology - controls luminosity based on reflecting light.
- 07 – Enhanced close-up and distance visibility - variable focus feature.
- 08 – Removable and washable head straps.



<sup>1-5</sup> Information on page 80



## LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux <sup>1</sup> (lm)	–	220	–	20
➡ Beam distance <sup>1</sup> (m)	–	130	–	40
🕒 Run Time <sup>1</sup> (h)	–	5	–	20
Light Modes	Low Power, Power, Blink			
Configuration	1x Power LED			

## BATTERY

🔋 Li-ion rechargeable battery	1 x Polymer 3.7 V Battery Pack
Capacity <sup>2</sup> (Wh/mAh)	3.256 / 880
🕒 Charge Time <sup>5</sup> (min)	240
Temperature Range	-20°C to +40°C

Accessories on page 78


## CASING

📏 Length – defocused (mm)	–
🌀 Head diameter (mm)	29
⚖ Weight (g   oz)	93   3.3 (inkl. Batterien)
☁ Water Resistance	IPX6
Switch	Front Switch

## FEATURES

Constant Current, Energy Saving
Charge Indicator, Low Battery Warning
Transportation Lock, Dimmbar, Red Reading Light

## TECHNOLOGIES

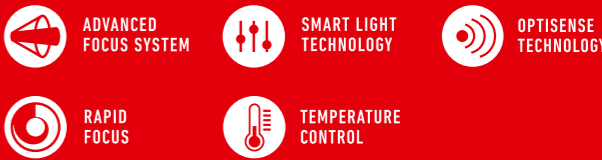

## PACKAGING AND LOGISTICS

	Box		Test-it-Blister	
Color	Blue	Black	Blue	Black
Item number	6007-R	6007-RB	6107-R	6107-RB
GTIN	4029113600705	4029113600736	4029113610759	4029113610735
Packaging dimensions (mm)	101 x 101 x 95	101 x 101 x 95	132 x 240 x 66	132 x 240 x 66
Tare weight (g)	220	220	245	245
Contents	1 rechargeable battery, USB cable	1 rechargeable battery, USB cable	1 rechargeable battery, 1 set of batteries, USB cable	1 rechargeable battery, 1 set of batteries, USB cable
Price, MSRP (€)	94.90	94.90	94.90	94.90

<sup>1-5</sup> Informationen auf Seite 80

SEO5



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	180	–	20
↔ Beam distance¹ (m)	–	120	–	40
🕒 Run Time¹ (h)	–	7	–	25
Light Modes	Low Power, Power, Blink			
Configuration	1x Power LED			

CASING

📏 Lenght – defocused (mm)	–
🌀 Head diameter (mm)	29
⚖ Weight (g   oz)	105   3.7
☁ Water Resistance	IPX6
Switch	Front Switch

BATTERY


🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

FEATURES

Energy Saving, Low Battery Warning
Transportation Lock, Dimmable
Red Reading Light

Accessories on page 78

TECHNOLOGIES

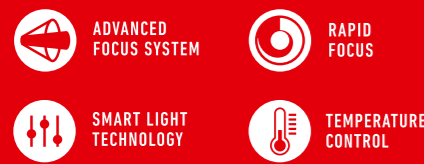

PACKAGING AND LOGISTICS

	Box		Test-it-Blister	
Color	Gray	Red	Gray	Red
Item number	6005	6006	6105	6106
GTIN	4029113600507	4029113600606	4029113610551	4029113610650
Packaging dimensions (mm)	101 x 103 x 94	101 x 103 x 94	132 x 240 x 66	132 x 240 x 66
Tare weight (g)	210	210	242	242
Contents	1 set of batteries	1 set of batteries	2 set of batteries	2 set of batteries
Price, MSRP (€)	54.90	54.90	54.90	54.90

1-5 Information on page 80

SEO3



LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	100	–	15
↔ Beam distance¹ (m)	–	100	–	30
🕒 Run Time¹ (h)	–	10	–	40
Light Modes	Low Power, Power, Blink			
Configuration	1x Power LED			

CASING

📏 Lenght – defocused (mm)	–
🌀 Head diameter (mm)	29
⚖ Weight (g   oz)	105   3.7 (Batteries incl.)
☁ Water Resistance	IP56
Switch	Front Switch

BATTERY

🔋 Battery	3x Micro (AAA) 1.5 V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20 °C to +40 °C

FEATURES

Energy Saving, Transportation Lock,
Red Reading Light

Accessories on page 78

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Box		Test-it-Blister	
Color	Green	Orange	Green	Orange
Item number	6003	6004	6103	6104
GTIN	4029113600309	4029113600408	4029113610353	4029113610452
Packaging dimensions (mm)	101 x 103 x 94	101 x 103 x 94	132 x 240 x 66	132 x 240 x 66
Tare weight (g)	217	217	242	242
Contents	1 set of batteries	1 set of batteries	2 set of batteries	2 set of batteries
Price, MSRP (€)	29.90	29.90	29.90	29.90

1-5 Information on page 80



**H14R.2**

Luminous flux (max.): 1000 lm<sup>1</sup>  
Beam distance (max.): 300 m<sup>1</sup>  
Run Time (max.): 35 h<sup>1</sup>

MSRP(€) 169,90



**H8R**

Luminous flux (max.): 600 lm<sup>1</sup>  
Beam distance (max.): 150 m<sup>1</sup>  
Run Time (max.): 120 h<sup>1</sup>

MSRP(€) 79,90



**H7R.2**

Luminous flux (max.): 300 lm<sup>1</sup>  
Beam distance (max.): 160 m<sup>1</sup>  
Run Time (max.): 30 h<sup>1</sup>

MSRP(€) 89,90



**H7.2**

Luminous flux (max.): 250 lm<sup>1</sup>  
Beam distance (max.): 160 m<sup>1</sup>  
Run Time (max.): 30 h<sup>1</sup>

MSRP(€) 69,90



**H6R**

Luminous flux (max.): 200 lm<sup>1</sup>  
Beam distance (max.): 120 m<sup>1</sup>  
Run Time (max.): 40 h<sup>1</sup>

MSRP(€) 59,90

LET SOMEBODY ELSE DO —  
THE HEADWORK.



**H6**

Luminous flux (max.): 200 lm<sup>1</sup>  
Beam distance (max.): 120 m<sup>1</sup>  
Run Time (max.): 60 h<sup>1</sup>

MSRP(€) 49,90



**H4R**

Luminous flux (max.): 250 lm<sup>1</sup>  
Beam distance (max.): 35 m<sup>1</sup>  
Run Time (max.): 40 h<sup>1</sup>

MSRP(€) 49,90



**H4**

Luminous flux (max.): 250 lm<sup>1</sup>  
Beam distance (max.): 35 m<sup>1</sup>  
Run Time (max.): 40 h<sup>1</sup>

MSRP(€) 29,90



**H3.2**

Luminous flux (max.): 120 lm<sup>1</sup>  
Beam distance (max.): 100 m<sup>1</sup>  
Run Time (max.): 60 h<sup>1</sup>




MSRP(€) 29,90

# H14R.2



LET SOMEBODY ELSE DO  
THE HEADWORK.



 1000 lm<sup>1</sup> —  
 300 m<sup>1</sup> —  
 35 h<sup>1</sup> —

- 01** – Rechargeable and ready to take on extremes - powered by rechargeable or normal batteries.
- 02** – Dimming - efficient and seamlessly adjustable light modes (e.g. dim to as low as 5 lumen).
- 03** – Well informed - three-level battery charge indicator and low battery alert.
- 04** – More safety and visibility - rear light feature can be added.
- 05** – Everything at a glance - 90° pivoting head.
- 06** – Quickly change the light beam using one hand - Rapid Focus.
- 07** – Enhanced close-up and distance visibility - seamless focus feature of homogeneous, circular low beam (defocused) to a sharply bundled high beam (focused).
- 08** – Ultra-bright, brilliant light beam - Xtreme LED.



# H14R.2



### LED

	Boost	Power	Mid Power	Low Power
Luminous flux¹ (lm)	1000	450	–	60
Beam distance¹ (m)	300	200	–	70
Run Time¹ (h)	6	12	–	35
Light Modes	Low Power, Power, Boost, Blink			
Configuration	1x Xtreme LED			

### BATTERY

Li-ion rechargeable battery	2x18650 Battery Pack 3.7V
Capacity² (Wh/mAh)	16.28 / 4400
Charge Time⁵ (min)	480
Temperature Range	-20°C to +40°C

### TECHNOLOGIES

ADVANCED FOCUS SYSTEM

RAPID FOCUS

SMART LIGHT TECHNOLOGY

TEMPERATURE CONTROL

### PACKAGING AND LOGISTICS

	Box
Item number	7299-R
GTIN	4029113729932
Packaging dimensions (mm)	137 x 100 x 115 (W x H x D)
Tare weight (g)	548
Contents	1 rechargeable battery, USB cable, USB power adapter, extension cable
Price, MSRP (€)	169.90

1-5 Information on page 80



### CASING

Length – defocused (mm)	–
Head diameter (mm)	37
Weight (g   oz)	340   12
Water Resistance	IPX4
Switch	Front Switch, Multifunctional Switch

### FEATURES

Energy Saving, Constant Current
Charge Indicator, Battery Indicator
Low Battery Warning, Rear Light
Dimmable, Transportation Lock

Accessories on page 78

# H8R



600 lm¹

150 m¹

120 h¹

- 01 – Extra safety - red rear light.
- 02 – Eco-friendly and convenient - cutting-edge battery technology for the fastest charging time via USB in any situation.
- 03 – Removable and washable head strap.
- 04 – Comfortable - best weight-to-lumen ratio of all Ledlenser headlamps.
- 05 – Easy operation - one switch, three light modes.
- 06 – Everything at a glance - pivoting head.
- 07 – Enhanced close-up and distance visibility - variable focus feature.
- 08 – One white Xtreme LED.



1-5 Information on page 80

# H8R



### LED

	Boost	Power	Mid Power	Low Power
Luminous flux¹ (lm)	–	600	250	10
Beam distance¹ (m)	–	150	100	20
Run Time¹ (h)	–	10	15	120
Light Modes	Power, Mid Power, Low Power			
Configuration	1x Xtreme LED			

### BATTERY

Li-ion rechargeable battery	1x 18650 3.7V
Capacity² (Wh/mAh)	12.58 / 3400
Charge Time⁵ (min)	80% after 180   100% after 360
Temperature Range	-20°C to +40°C

### CASING

Lenght – defocused (mm)	–
Head diameter (mm)	36
Weight (g   oz)	158   5.6
Water Resistance	IP54
Switch	Front Switch

### FEATURES

Energy Saving, Low Battery Warning
Charge Indicator, Rear Light
Transportation Lock

Accessories on page 78

### TECHNOLOGIES

ADVANCED FOCUS SYSTEM

SMART LIGHT TECHNOLOGY

RAPID FOCUS

TEMPERATURE CONTROL

### PACKAGING AND LOGISTICS

	Box	Blister
Item number	500853	500852
GTIN	4058205005623	4058205005593
Packaging dimensions (mm)	170 x 230 x 93 (W x H x D)	135 x 115 x 100 (W x H x D)
Tare weight (g)	320	340
Contents	1 rechargeable battery, USB cable	1 rechargeable battery, USB cable
Price, MSRP (€)	79.90	79.90

1-5 Information on page 80

# H7R.2



### LED

	Boost	Power	Mid Power	Low Power
Luminous flux¹ (lm)	300	200	–	20
Beam distance¹ (m)	160	140	–	50
Run Time¹ (h)	4	10	–	30
Light Modes	Low Power, Power, Boost, Blink			
Configuration	1x High Power LED			

### BATTERY

Li-ion rechargeable battery	1x Polymer 3.7V
Capacity² (Wh/mAh)	5.18 / 1400
Charge Time⁵ (min)	300
Temperature Range	-20°C to +40°C

### CASING

Lenght – defocused (mm)	–
Head diameter (mm)	35
Weight (g   oz)	165   5.8
Water Resistance	IPX6
Switch	Front Switch, Multifunctional Switch

### FEATURES

Energy Saving, Constant Current
Low Battery Warning, Charge Indicator
Battery Indicator, Rear Light
Dimmable, Transportation Lock

Accessories on page 78

### TECHNOLOGIES

ADVANCED FOCUS SYSTEM

SMART LIGHT TECHNOLOGY

RAPID FOCUS

TEMPERATURE CONTROL

### PACKAGING AND LOGISTICS

	Box	Test-it-Blister
Item number	7298	7398
GTIN	4029113729802	4029113739856
Packaging dimensions (mm)	102 x 100 x 95 (W x H x D)	170 x 230 x 94 (W x H x D)
Tare weight (g)	321	424
Contents	1 rechargeable battery, USB cable, USB power adapter	1 rechargeable battery, USB cable, USB power adapter
Price, MSRP (€)	89.90	89.90

1-5 Information on page 80

# H7.2



### LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	250	200	–	20
↔ Beam distance¹ (m)	160	140	–	50
🕒 Run Time¹ (h)	5	8	–	30
Light Modes	Low Power, Power, Boost, Blink			
Configuration	1x High Power LED			

### BATTERY

🔋 Battery	4x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

### TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM



SMART LIGHT  
TECHNOLOGY



RAPID  
FOCUS



TEMPERATURE  
CONTROL

### PACKAGING AND LOGISTICS

	Box	Test-it-Blister
Item number	7297	7397
GTIN	4029113729703	4029113739757
Packaging dimensions (mm)	101 x 100 x 96 (W x H x D)	170 x 230 x 93 (W x H x D)
Tare weight (g)	286	373
Contents	1 set of batteries	1 set of batteries
Price, MSRP (€)	69.90	69.90

1-5 Information on page 80

# H6R



### LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	200	–	5
↔ Beam distance¹ (m)	–	120	–	20
🕒 Run Time¹ (h)	–	2	–	40
Light Modes	Low Power, Power			
Configuration	1x Power LED			

### BATTERY

🔋 NiMH rechargeable battery	3x Micro (AAA) 1.2V
Capacity² (Wh/mAh)	3.24 / 900
🕒 Charge Time⁵ (min)	180⁵
Temperature Range	-20°C to +40°C

### TECHNOLOGIES



ADVANCED  
FOCUS SYSTEM

### PACKAGING AND LOGISTICS

	Box	Test-it-Blister
Item number	7296-R	7396-R
GTIN	4029113729635	4029113739689
Packaging dimensions (mm)	100 x 85 x 80 (W x H x D)	112 x 205 x 78 (W x H x D)
Tare weight (g)	243	290
Contents	1 rechargeable battery, belt pouch, USB cable	1 rechargeable battery, 1 set of batteries, USB cable
Price, MSRP (€)	59.90	59.90

1-5 Information on page 80

# H6



### LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	200	–	5
➡ Beam distance¹ (m)	–	120	–	20
🕒 Run Time¹ (h)	–	4	–	60
Light Modes	Low Power, Power			
Configuration	1x Power LED			

### BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

### TECHNOLOGIES



### PACKAGING AND LOGISTICS

	Box	Test-it-Blister
Item number	7296	7396
GTIN	4029113729604	4029113739658
Packaging dimensions (mm)	101 x 86 x 80 (W x H x D)	112 x 205 x 68 (W x H x D)
Tare weight (g)	228	268
Contents	1 set of batteries, belt pouch	2 set of batteries
Price, MSRP (€)	49.90	49.90

1-5 Information on page 80

# H3.2



### LED

	Boost	Power	Mid Power	Low Power
☀ Luminous flux¹ (lm)	–	120	–	5
➡ Beam distance¹ (m)	–	100	–	20
🕒 Run Time¹ (h)	–	6	–	60
Light Modes	Low Power, Power			
Configuration	1x Power LED			

### BATTERY

🔋 Battery	3x Micro (AAA) 1.5V
Capacity² (Wh/mAh)	–
🕒 Charge Time⁵ (min)	–
Temperature Range	-20°C to +40°C

### TECHNOLOGIES



### PACKAGING AND LOGISTICS

	Box	Test-it-Blister
Item number	500767	500768
GTIN	4058205000666	4058205000673
Packaging dimensions (mm)	100 x 80 x 80 (W x H x D)	112 x 205 x 76 (W x H x D)
Tare weight (g)	208	283
Contents	1 set of batteries	2 set of batteries
Price, MSRP (€)	29.90	29.90

1-5 Information on page 80

### CASING

↗ Lenght – defocused (mm)	–
🕒 Head diameter (mm)	28
📏 Weight (g   oz)	133   4.7
☁ Water Resistance	IPX4
Switch	Front Switch

### FEATURES

Energy Saving, Dimmable

Accessories on page 78

### CASING

↗ Lenght – defocused (mm)	–
🕒 Head diameter (mm)	28
📏 Weight (g   oz)	133   4.7
☁ Water Resistance	IPX4
Switch	Front Switch

### FEATURES

Energy Saving, Dimmable

Accessories on page 78




H4R





NEW







LED

	Boost	Power	Mid Power	Low Power
 Luminous flux¹ (lm)	250	150	–	20
 Beam distance¹ (m)	35	25	–	10
 Run Time¹ (h)	–	3	–	40
Light Modes	Boost, Power, Low Power			
Configuration	1x Power LED			

BATTERY

 NiMH rechargeable battery	Battery Pack 3,7V
Capacity² (Wh/mAh)	5,18 / 1400
 Charge Time⁵ (min)	240
Temperature Range	-20°C bis +40°C

CASING

 Lenght – defocused (mm)	–
 Head diameter (mm)	70
 Weight (g   oz)	95   3,35
 Water Resistance	IPX57
Switch	Front Switch

FEATURES

Constant Light, Low Battery Warning,
Charge Indicator, Rear Light,
Transportation Lock

Accessories on page 78

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Box	Blister
Item number	501098	501099
GTIN	4058205015622	4058205015653
Packaging dimensions (mm)	100 x 80 x 80 (W x H x D)	112 x 205 x 68 (W x H x D)
Tare weight (g)	188	188,5
Contents	1 rechargeable battery, USB cable	1 rechargeable battery, USB cable
Price, MSRP (€)	49,90	49,90

1-5 Information on page 80




H4





NEW







LED

	Boost	Power	Mid Power	Low Power
 Luminous flux¹ (lm)	250	150	–	20
 Beam distance¹ (m)	35	25	–	10
 Run Time¹ (h)	–	3	–	40
Light Modes	Boost, Power, Low Power			
Configuration	1x Power LED			

BATTERY

 Battery	3x Micro (AAA) 1,5V
Capacity² (Wh/mAh)	–
 Charge Time⁵ (min)	–
Temperature Range	-20°C bis +40°C

CASING

 Lenght – defocused (mm)	–
 Head diameter (mm)	70
 Weight (g   oz)	100   3,53
 Water Resistance	IPX57
Switch	Front Switch

FEATURES

Constant Light, Low Battery Warning,
Charge Indicator, Rear Light,
Transportation Lock

Accessories on page 78

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Box	Blister
Item number	501096	501097
GTIN	4058205015561	4058205015653
Packaging dimensions (mm)	100 x 80 x 80 (W x H x D)	112 x 205 x 68 (W x H x D)
Tare weight (g)	183	188,5
Contents	1 set of batteries	1 set of batteries
Price, MSRP (€)	29,90	29,90

1-5 Information on page 80

PL6



750 lm<sup>1</sup>  
55 h<sup>1</sup>

- 01 – Micro Prism Technology: cutting-edge lens technology for glare-free light and high energy efficiency.
- 02 – Switch for intuitive and easy operation, continuous dimming and built-in battery indicator.
- 03 – Flexible rubber hook for hanging.
- 04 – Built-in magnet to secure the product to metal surfaces.
- 05 – Built-in USB port for easy charging.
- 06 – Fluorescent elements make the lamp easy to find in the dark.
- 07 – Compact, space-saving design.



<sup>1-5</sup> Information on page 80

LED

	Boost	Power	Mid Power	Low Power
Luminous flux <sup>1</sup> (lm)	750	550	–	20
Beam distance <sup>1</sup> (m)	–	–	–	–
Run Time <sup>1</sup> (h)	–	3	–	55
Light Modes	Blink, Strobe, S.O.S., Boost, Low Power, Power, Pulse			
Configuration	18x Power LED			

BATTERY

Li-ion rechargeable battery	Battery Pack 3,6V
Capacity <sup>2</sup> (Wh/mAh)	9.25 / 2500
Charge Time <sup>5</sup> (min)	480
Temperature Range	-20°C to +40°C

Accessories on page 78

CASING

Length – defocused (mm)	178
Head diameter (mm)	42
Weight (g   oz)	280   9.9
Water Resistance	IP54
Switch	Front Switch

FEATURES

Energy Saving, Low Battery Warning
Charge Indicator, Battery Indicator
Dimmable, Transportation Lock
Red Reading Light

TECHNOLOGIES



PACKAGING AND LOGISTICS

	Blister
Item number	500943
GTIN	4058205012072
Packaging dimensions (mm)	150 x 240 x 95 (W x H x D)
Tare weight (g)	430
Contents	1 rechargeable battery, USB cable
Price, MSRP (€)	69.90

<sup>1-5</sup> Information on page 80

# FLASHLIGHTS

## ACCESSORIES



### USB Car Charger – 0380

This handy USB car charger adapter fits into any cigarette lighter. So you can even charge the Ledlenser on the road.



### Intelligent Clip Type C - 0317

Use this convenient belt clip to simply carry the Ledlenser flashlight on your pants, keeping your hands free.

The clip can be rotated 360° thereby transforming the light into a flexible spotlight.



### Car Charger – 0386

This handy 12 Volt car charger with integrated cable fits into any standard cigarette lighter. So you can even charge your Ledlenser on the road



### Remote Switch – various item nos.

The Remote Switch allows you to turn on your Ledlenser remotely - quietly, without jerking or shaking. To install, simply replace the end cap on your light with the remote switch end piece.



### Universal Mounting System Item no. 0362

This sturdy universal holder safely holds lights 25 to 34 mm in diameter and can be flexibly attached to tripods and other bars.



### Universal Mounting Bracket various item nos.

This sturdy universal mount allows you to quickly and easily mount flashlights to tripods or other bars.



### GoPro-Adapter-Set Item no. 501034

Ledlenser meets GoPro: The light mount for a Ledlenser flashlight can also be used for a GoPro, including compatible systems and accessories. The adapter is made of aluminum and therefore extremely tough and durable. It can be mounted to bars without any additional tools and the 360° swivel means maximum flexibility.



### Roll Protection – Item no. 0313

This roll protection is essential for pros as well as your average Joe: It simply attaches to the front of the flashlight and stops it from rolling away on sloping surfaces. The ring also protects the flashlight head from scratches.



### Tripod Item no. 500993

Its low weight, excellent sturdiness and load capacity of up to 1000 g make the tripod the perfect companion on the road. The 1/4" screw thread and additional adapters allow the tripod to be used with a wide range of Ledlenser products.

# FLASHLIGHTS

## ACCESSORIES

TYPE	P2/3	P3R	P4/X	P5	P5R	P6	P7	L7	P7R	P7QC	P14	P17		P17R	T <sup>2</sup>	T <sup>2</sup> QC	T5.2	T7.2	T7M	TT	F1	F1R	PL6	X21R.2	ITEM NO.	PRICE, MSRP (€)
Pouch Type A							•	•										•	•						0333	9.90
Pouch Type D				•	•										•	•	•					•			0337	9.90
Pouch Type G									•																0342	9.90
Pouch with Color Filter Set							•	•	•									•	•						0039	24.90
Safety Bag Type E																				•					0338	9.90
Tactical Professional Holster Type B							•	•	•									•	•						0323	34.90
Tactical Professional Holster Type A																				•					0322	34.90
Intelligent Clip Type A				•	•	•											•								0315	8.90
Intelligent Clip Type C							•		•									•	•						0317	8.90
GoPro Adapter Set Type A							•		•																501034	39.90
Universal Mounting Bracket Type B							•	•	•						•	•		•	•	•					7799-PT	15.90
Universal Mounting Bracket Type C				•	•	•											•								7799-PT5	12.90
Universal Mounting System		•		•	•	•	•	•	•						•	•	•	•	•	•	•	•			0362	14.90
Tripod Type A							•		•	•	•												•		500993	19.90
Signal Cone 26mm				•	•	•									•	•	•								7479	6.90
Signal Cone 32mm																				•					0041	6.90
Signal Cone 37mm							•	•	•									•	•						0040	6.90
Signal Cone W 37mm							•	•	•									•	•						0040-W	6.90
Signal Cone 47mm											•														7478	6.90
Signal Cone 53mm												•		•											0042	9.90



POUCH  
(Item no.: various)



TACTICAL HOLSTER  
(Item no.: various)



FLOATING CHARGE SYSTEM  
(Item no.: various)




SIGNAL CONE  
(Item no.: various)


# FLASHLIGHTS

## ACCESSORIES

TYPE	P2/3	P3R	P4/X	P5	P5R	P6	P7	L7	P7R	P7QC	P14	P17		P17R	T <sup>2</sup>	T <sup>2</sup> QC	T5.2	T7.2	T7M	TT	F1	F1R	PL6	X21R.2	ITEM NO.	PRICE, MSRP (€)
Car Charger														•									•	•	0386	19.90
USB Car Charger		•			•				•													•	•		0380	9.90
USB Power Supply and Adapter Cable					•				•														•		0389	14.90
External 18650 Li-Ion Charger									•													•			0355	16.90
Floating Charge System Type A					•																				0381	19.90
Floating Charge System Type B									•																0382	24.90
4x AAA Alkaline Ionic	•		•				•	•		•					•	•		•	•	•					500981	3,49
4x AA Alkaline Ionic				•		•					•						•								500980	3,49
Li-Ion rechargeable Battery 3,7V \/ 320mAh		•																							7701	14.90
14500 Li-Ion rechargeable Battery 3,7V \/ 700mAh					•																				7703	14.90
18650 Li-Ion rechargeable Battery 3,7 V \/ 3400 mAh									•													•	•		501001	24.90
Roll Protection 37mm							•	•	•									•	•						0313	9.90
Roll Protection Ring 29,5 mm							•		•									•	•						0320	6.90
Color Filter Set + 1x Rollprotection 37mm							•	•	•									•	•						0313-F	19.90
Color Filter Set 37mm							•		•																100879	19.90
Remote Switch Type A																		•	•						0360	19.90
Remote Switch Type B							•																		0361	19.90
Remote Switch Type F																				•					501075	19.90



ROLL PROTECTION RING  
(Item no.: 0320)

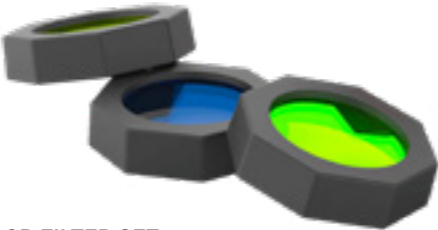

COLOR FILTER SET  
(Item no.: 100879)



EXTERNAL CHARGER (Item no.: 0355)



USB POWER SUPPLY (Item no.: 0389)

# HEADLAMPS

## ACCESSORIES

TYPE	SE03	SE05	SE07R	H3.2	H4/H4R	H6		H6R	H7.2	H7R.2	H8R	H14R.2	ITEM NO.	PRICE, MSRP (€)
Helmet Band Fixing Clip (4x)	•	•	•	•		•		•	•	•	•	•	0359	6.90
Helmet Connecting Kit Type B	•	•	•										0368	9.90
Color Filter Set 35mm									•	•			100880	19.90
Color Filter Set 37mm												•	100879	19.90
Color Filter Set 36mm											•		501506	19.90
Roll Protection 37mm												•	0313	9.90
Rubberized Helmetband									•	•			0394	12.90
Rubberized Reflecting Helmetband	•	•	•										0390	15.90
Reflective Chest Belt Type A	•	•	•										500935	14.90
Pouch Type H				•	•	•		•		•			0332	12.90
4x AAA Alkaline Ionic	•	•	•	•		•		•	•	•			500981	3,49
4x AA Alkaline Ionic												•	500980	3,49
Li-Ion rechargeable Battery pack 3,7V \ / 880 mAh	•	•	•										7784	19.90
Li-Ion rechargeable Battery pack 3,7V \ / 1400 mAh									•	•			7789	24.90
18650 Li-Ion rechargeable Battery 3,7V \ / 3400 mAh											•		501001	24.90
2x 18650 Li-Ion rechargeable Battery Pack 3,7V \ / 4400 mAh												•	7795	39.90
USB Car Charger			•					•		•	•	•	0380	9.90
USB Power Supply and Adapter Cable			•					•		•		•	0389	14.90
XEO PowerBox including Bag									•	•	•	•	500831	150.00



POUCH TYPE H  
(Item no.: 0332)



HELMET CONNECTING KIT  
(Item no.: 0393)



HELMET FIXING CLIPS  
(Item no.: 0359)



REFLECTIVE CHEST BELT  
TYPE A  
(Item no.: 500935)

# NOTES

The information pertaining to package contents, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change package contents, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and misprints excepted.

1) Measurements according to ANSI FL1 on the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (Lumen/lm) and beam distance (meters/m) on the highest setting and to the run time (hours/h) on the lowest setting. If the light is equipped with color LED(s), the measurements indicated apply to white light or white LED. A boost function (if applicable) can be used several times, but only for short periods of time. If the light has different energy modes, measurement is based on "energy saving mode."

2) Calculated capacity value in watt-hours (Wh) or milliampere hours (mAh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.

3) EP Patent 1880139; US Patent 7,461,960

4) Five year warranty from the date of purchase, or seven years with online registration through our website. The warranty applies worldwide; legal warranty rights also apply. It covers defects in material and manufacture. Battery packs are guaranteed to work correctly for 24 months. This warranty does not cover products in the "Solidline" series, Ledlenser K1 and Ledlenser K2, as well as defective batteries, holsters, pouches, remote switches, color filters, imprints and surface coatings. The warrantor is Ledlenser GmbH & Co. KG, Kronenstr. 5-7, 42699 Solingen, Germany. For more information visit [ledlenser.com/warranty](http://ledlenser.com/warranty)

5) Charging time may vary by power supply.

## Ledlenser GmbH & Co. KG

Kronenstraße 5-7, 42699 Solingen, Germany.

VAT ID no.: DE815242425, Amtsgericht Wuppertal, HRA 23078

Personally liable partner:

Ledlenser Beteiligungs GmbH

Company headquarters: Solingen, Germany

District Court Wuppertal, HRB 24774

Managing director: Thomas Willing

# LEDLENSER HAPPY TO BE IN TOUCH

Our service is proven to be direct, competent and comprehensive. Even though overall we get positive feedback, we are always looking at ways to improve the quality of our service. We greatly appreciate your feedback. Tell us or send us your thoughts.

## MARKETING CONTACT

For information about marketing and material approval, e-mail us at:  
**[marketing@ledlenser.com](mailto:marketing@ledlenser.com)**.

## TECHNICAL SUPPORT CONTACT

For direct and hassle-free technical support call  
+49 (0) 212 5948-111

Or online at: **[ledlenser.com/support](http://ledlenser.com/support)**

